

Machine Sentry®

Experience What's Possible

Machine Sentry® Online Type: MSO-1




- **Flexible online condition monitoring system** with vibration analysis, process parameters, thermography and oil analysis capabilities
- **Multi-channel vibration monitoring** continuous monitoring of up to 8 vibration sensors plus 4 other low speed inputs (optional)
- **24/7 online remote monitoring** accessible anytime, anywhere via a secure portal login
- **Flexible connection options** GPRS cellular connection, wired or wi-fi. With optional email notifications.

Machine Sentry®

Machine Sentry®, a unique cost effective Condition Based Maintenance (CBM) solution that integrates all CM techniques and data, to enabling effective maintenance planning and management reporting.

Benefits

- Suits the needs of both expert and novice users
- Up to 5 times faster than other condition monitoring systems
- Can be used either as a standalone tool or alongside an existing enterprise system (e.g. SAP, Maximo, PEMAC, etc.)
- Access to world leading condition monitoring engineers – providing detailed diagnosis and advice
- Easily configurable and scalable for future expansion

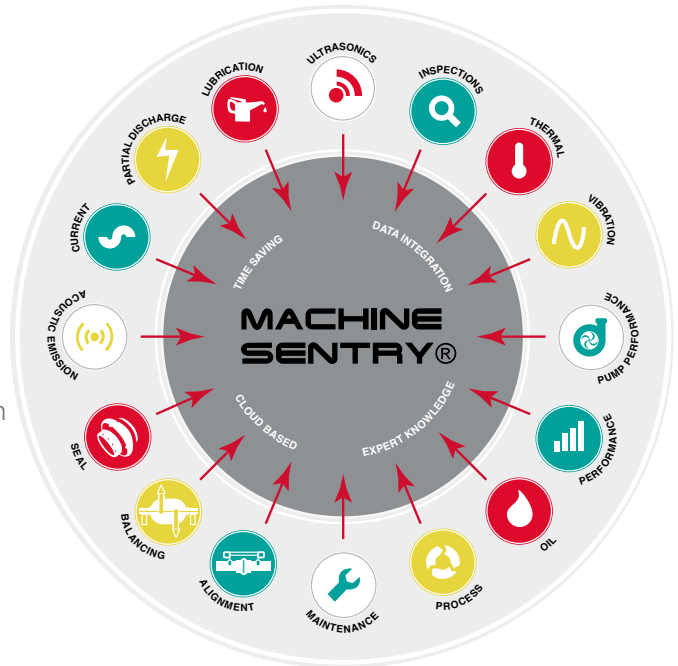

“AVT Reliability® provides Condition Monitoring services for many blue chip clients, on hundreds of sites.”

Typical Applications

- Continuous monitoring
- Highly critical asset management
- Troubleshooting



Machine Sentry® Vibration and Process Sensor Type: MSO-1

Machine Sentry® vibration and process sensor type MSO-1 is the ultimate condition monitoring solution.

Machine Sentry® MSO-1 is ideally suited for monitoring of pumps, fans, gearboxes, cranes, compressors, wind turbines, gas and steam turbines, electric motors and many more. It is perfect for your most critical assets.

The Machine Sentry® web platform provides access to detailed condition monitoring data, with no historical restriction, which can be supported by world leading condition monitoring engineers.

Secure access is available from anywhere in the world via a standard web browser. In addition, the mobile software operates on industry standard Android™ tablets or smartphones including ATEX certified versions.

Machine Sentry® MSO-1 has 8 high speed dynamic inputs, with an additional 4 static inputs available as an option.

The Machine Sentry® MSO-1 as standard is available with either WiFi or GPRS antenna. This allows the system to

continuously connect to the web and enable the data to be view via a web portal. The enclosure can also be upgraded for ATEX environments.

Its small size, low power consumption, high storage capability, make the system very easy to install, operate and maintain, while delivering the functions required by expert analysts or plant operators.

“Protect your most valuable and critical assets.”

Machine Sentry® Features

Modular Cloud Based Machine Sentry® Software

– Features include: action tracking, watchkeeping, process measurements, thermal imaging integration, inspections, lubrication management, intuitive dashboard and reporting.

Vibration Analysis – With intelligent tri-axial vibration measurement capability and temperature sensor (patent pending) .

ADA™ Automated Diagnosis Assistant – Can predict stage 2, 3 and 4 bearing failure and detect a wide range of other common fault conditions.

Suitable for both fixed assets and rotating machinery – The Pipework Vibration Compliance feature allows a plant operator to quickly screen all process pipework and small bore connections in order to identify lines that have the greatest risk of failure.

Oil Analysis – Laboratory oil analysis data is automatically* mapped and integrated into the Machine Sentry® database for easy access by all users enabling better trending and analysis.

Key Performance Indicators (KPIs) – To systematically measure the effectiveness of the condition-based maintenance program from Schedule Compliance to Asset Health and Bad Actor Management.

Lubrication Management - Plan, track and manage lubrication activities and usage.

IP67 rated and ATEX certified - Certified for use in hazardous areas (Zone 1 and Zone 2).

* Supported Labs only

Specification

	MSO-1	MSO-1E
High speed inputs Sample rate 512 to 102400Hz, DC input range +/-24v, AC input range 24V ptop, 16 bit resolution, Accuracy 1%	8	8
Auxiliary Inputs: Sample rate up to 200Hz, DC input range +/-24v, 16 bit resolution, Accuracy 0.5%		4
Signal Processing: Spectral Lines Time waveform samples	100, 200, 400, 800, 1600, 3200, 6400, 12800 128 up to 8192	
Internal Memory Storage	4GB	
Analog Channels Indication	8 x red/green LED	8 x red/green LEDs
Network Communications	IEEE 1588 Ethernet Gigabit, Wireless Ethernet, GPRS	
Power Supply	20 to 26Vdc	
Power Consumption	<7W	
Size	TDB	
Mounting	TBD	
Weight	TBD	
Temperature Range	-30 to 65°C / -22 to 149°F	
Approvals	CE	
	EN55022:20/AC20912, EN51000-4-2:2010, EN51000-4-4:2005/A1:2010/CORR:2010, EN61000-4-3:2007/A2:2011, EN61000-4-6:2009, UNE-EN60950:2007	




Machine Sentry® supported by ADA™
the Automated Diagnostic Assistant.

AVT RELIABILITY®

The comprehensive AVT Reliability® program covers Asset Integrity, Performance Monitoring, Training, Maintenance Consultancy and Total Pump Management / Products to industry. AVT Reliability® are certified to ISO 17359 and ISO 9001. Accredited by UKAS as a Machine Directive Notified body, and are ICML and BINDT members.

Distributed by:

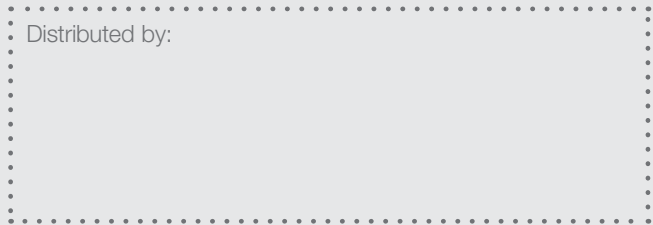

Head Office:

AVT Reliability Ltd
Unit 2, Easter Court, Europa Boulevard
Warrington, Cheshire, WA5 7ZB, UK

t: +44 (0)161 486 3737

e: info@avtreliability.com

www.avtreliability.com

Proud members of the AES
Engineering Ltd group of companies
“passionate about reliability”

